





THE AELIUS 300

The Aelius 300 is an excellent choice for full-cycle growing and is suitable for almost any growing environment.

FIXTURE DIMENSIONS

4" x 40"

12.4 LBS

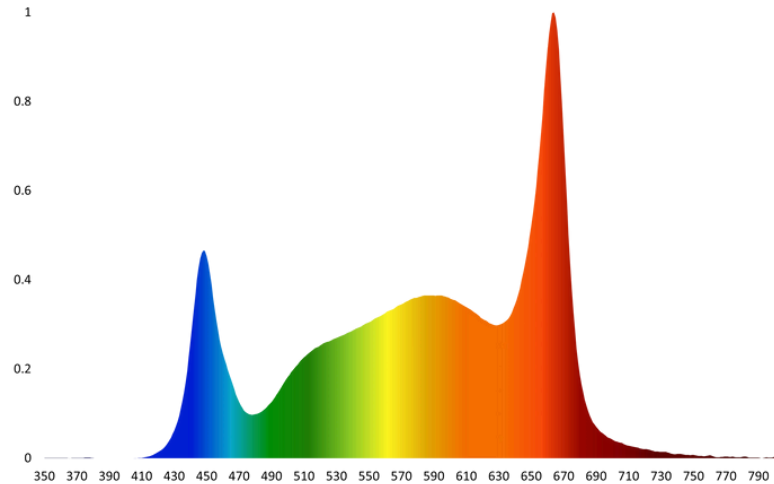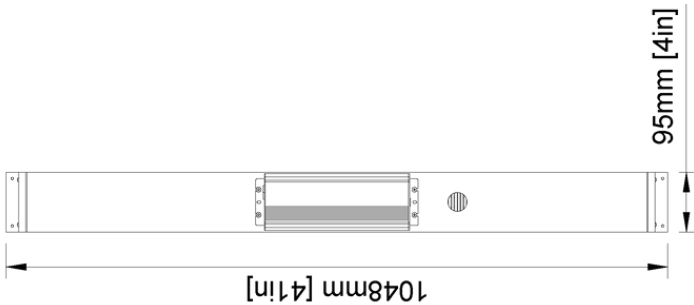

THE XRF SPECTRUM

The XRF Spectrum has proved itself time and time again to provide ideal light conditions for various stages of growth. Its versatility and efficiency have set a new standard for lighting in controlled environment agriculture.



FIXTURE HIGHLIGHTS

MODEL	APGL-AELIUS-3-I-1-M-NL
EFFICACY (400-800nm)	3.0 $\mu\text{mol}/\text{J}$
PHOTON FLUX (400-800nm)	960 $\mu\text{mol}/\text{s}$
POWER	320 W
VOLTAGE RANGE	100-480 V

THE AELIUS 300

FIXTURE SPECIFICATIONS

FULL MODEL NAME	Aelius 300
HIGH VOLTAGE RANGE	200 - 480V
LOW VOLTAGE RANGE	100 - 277V
LIFETIME	L90 > 50,000hrs
LED OPTICS	120° Primary Optics
DIMMABLE	0-10V
FIXTURE POWER	320 W
POWER FACTOR	0.96
FREQUENCY	50/60Hz
THD @ 100% POWER	8.6%
COVERAGE AREA	3X4
WARRANTY PERIOD	5 Years
DAMP LOCATIONS	IP65
DRIVER (Fixture Mounted)	uPowerTek



AELIUSTM
LED


LET'S CONNECT



1-844-472-3389



sales@aeliusled.com




aeliusled.com

@aeliusled

INCLUDED IN BOX

- LED Fixture
- LED Driver
- 240V Power Cord
- RJ-14 Dimming Daisy-Chain Cable
- 120V Adapter
- Dimmer (If Applicable)
- Stainless Steel Wire Hangers
- Rope Hangers

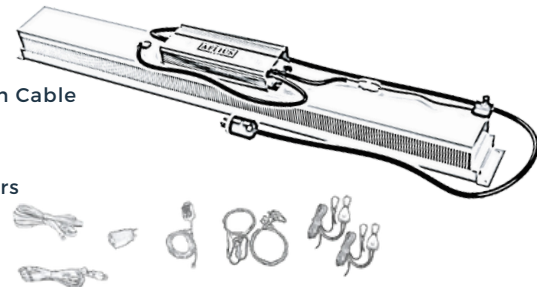

WHAT'S ABOVE YOUR PLANTS?