



THE AELIUS 60W LED TUBE

The Aelius 60W LED Tube is designed for growing leafy greens in vertical farming applications. To suit your unique growing needs, you can easily daisy chain the 60w tubes together.

FIXTURE DIMENSIONS

Single Bar




Length: 48" (1200mm)

Height: 2.6" (65mm)

3.15 LBS


Width: 2.0" (50mm)

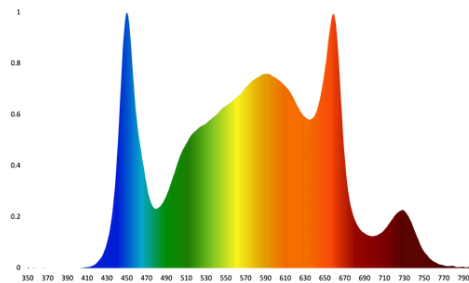

The **Far Red Spectrum** has the benefits of the standard spectrum with a spike in far red, leading to increased biomass production and fuller leaves.

THE FAR RED SPECTRUM

The **Standard Spectrum** is a balanced distribution of light that is proven to excel with most crops.

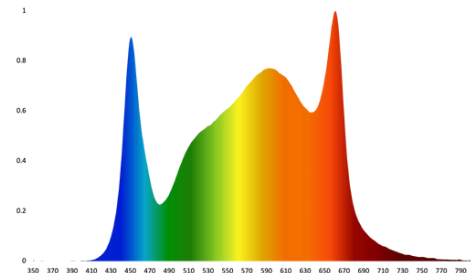

THE STANDARD SPECTRUM

FIXTURE HIGHLIGHTS

MODEL 202-60

EFFICACY (400-800nm) 2.92 $\mu\text{mol}/\text{J}$

PHOTON FLUX (400-800nm) 177 $\mu\text{mol}/\text{s}$

POWER 60.57 W

VOLTAGE RANGE 120-277 V



THE
AELIUS 60W
LED TUBE

FIXTURE SPECIFICATIONS

FULL MODEL NAME	The Aelius 60W LED Tube
INPUT VOLTAGE RANGE	120-277V
TEMPERATURE RANGE	-20 to 35 C°
LIFETIME	L90 > 43,000hrs
LED OPTICS	120° Primary Optics
DIMMABLE	0-10V with RJ-12 port
FIXTURE POWER	60.57 W
POWER FACTOR	0.975
FREQUENCY	50/60Hz
THD @ 100% POWER	14%
INDIVIDUAL COVERAGE	12" x 48"
TOTAL BOX COVERAGE	48" x 48" (12 " spacing)
WARRANTY PERIOD	5 Years
WET LOCATIONS	IP65
DAISY-CHAIN	8 Fixtures 120V 12 Fixtures 240V




LET'S CONNECT



1-844-472-3389



sales@aeliusled.com




aeliusled.com

@aeliusled

INCLUDED IN BOX

- LED Fixture (x2)
- Power Cable with RJ Dimming Cable
- 120V Adapter
- Mounting Brackets
- Dimmer (if requested)
- Mounting Screws, drywall anchors and cable ties (x4 of each)

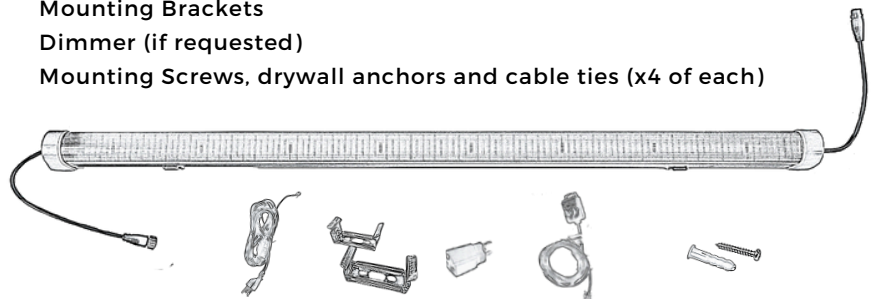

WHAT'S ABOVE YOUR PLANTS?