





THE AELIUS 300 **REDD**

Due to its slim design, the Aelius 300 REDD is a great choice for supplemental light in greenhouses, as well as for standard grow tables and in grow tents.

FIXTURE DIMENSIONS

4" x 40"
12.4 LBS

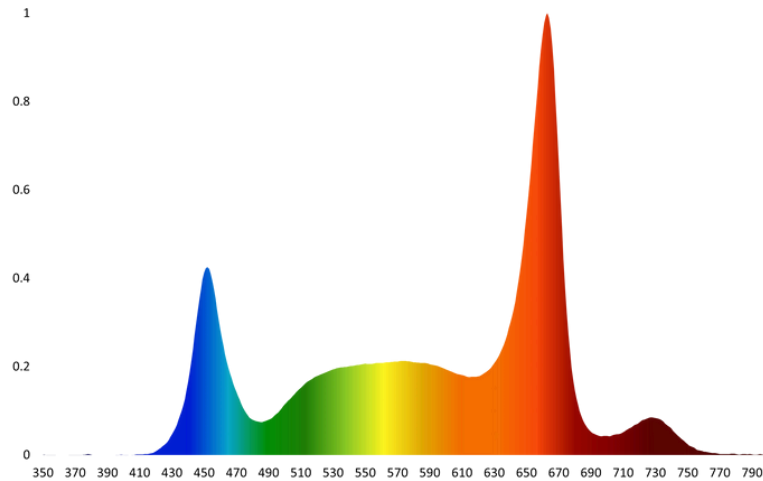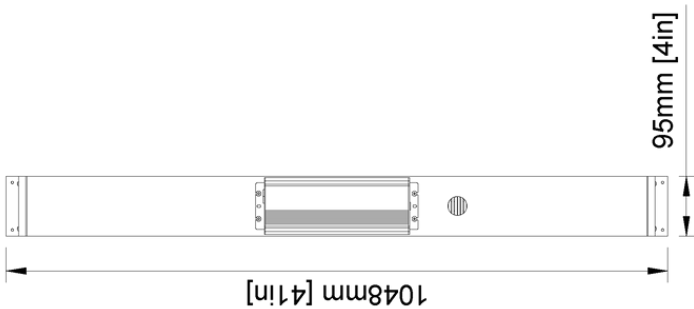

THE REDD SPECTRUM

The REDD Spectrum is specially designed for flowering and greenhouse cultivation. With the right balance of blue and red rich light, you can expect to truly experience the genetic potential of your crop.



FIXTURE HIGHLIGHTS

MODEL	APGL-AELIUS-3-G-1-M-NL
EFFICACY (400-800nm)	3.0 $\mu\text{mol/J}$
PHOTON FLUX (400-800nm)	960 $\mu\text{mol/s}$
POWER	320 W
VOLTAGE RANGE	100-480 V

THE AELIUS 300 REDD

FIXTURE SPECIFICATIONS

FULL MODEL NAME	Aelius 300 REDD
HIGH VOLTAGE RANGE	200 - 480V
LOW VOLTAGE RANGE	120 - 277V
LIFETIME	L90 > 43,000hrs
LED OPTICS	120° Primary Optics
DIMMABLE	0-10V
FIXTURE POWER	320 W
POWER FACTOR	0.96
FREQUENCY	50/60Hz
THD @ 100% POWER	6%
COVERAGE AREA	3X4
WARRANTY PERIOD	5 Years
DAMP LOCATIONS	IP65
DRIVER (Fixture Mounted)	uPowerTek



AELIUSTM
LED


LET'S CONNECT



1-844-472-3389



sales@aeliusled.com




aeliusled.com

@aeliusled

INCLUDED IN BOX

LED Fixture
LED Driver
240V Power Cord
RJ-14 Dimming Daisy-Chain Cable
120V Adapter
Dimmer (If Applicable)
Stainless Steel Wire Hangers
Rope Hangers

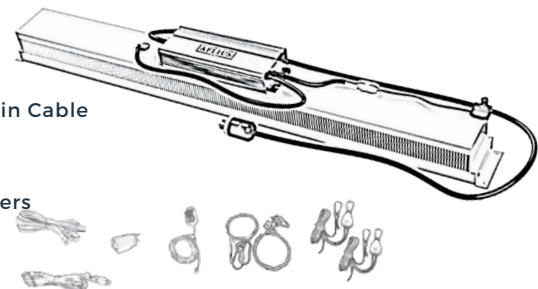

WHAT'S ABOVE YOUR PLANTS?